



## *Rugged Design and Optimal Functionality*

### Safety

#### ✓ Long non-contact distance

The FT3405 and FT3406 has a detection distance 2.5 times greater than its HIOKI predecessor, extending the distance from moving parts for added safety.

HIOKI 3403/ 3404	200 mm/ 7.8"
HIOKI FT3405/ FT3406	<b>500mm/ 19.7"</b>

#### ✓ Red LED

The red LED lets you continuously focus on the measurement spot even when testing from afar.




### Reliability

#### ✓ DROP PROOF



Testers are built tough to withstand a 1-meter drop onto a concrete floor.



#### ✓ Dust-proof construction

IP50 dust-proof structure makes the Tacho HiTesters tough against the dirt and dust that are unavoidable in field environments.



### Convenience

#### ✓ Contact Testing Also Available


By using the optional Z5003 contact adapter, the FT3405 and FT3406 become contact-type tachometers.



#### ✓ Signal Output

**FT3406 only**


With the built-in analog output and pulse output functions, you can record the variations in rotation by connecting the Tacho HiTester to a recorder or data logger. Use an AC adapter with the FT3406 for long-term measurements.




## Waveform recording

Measure signal variations with a waveform recorder or data logger by using the FT3406's analog output or pulse output functions. Use a multi-channel logger in combination with input from other types of sensors, or a multi-channel recorder to simultaneously measure voltage and current.

Analog output

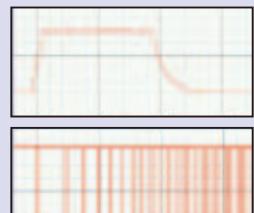

Pulse output

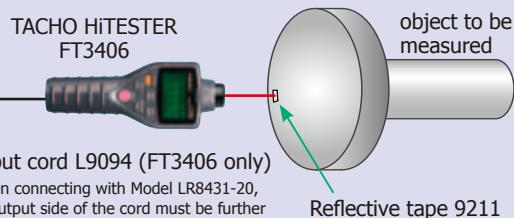

Output cord L9094 (FT3406 only)  
When connecting with Model LR8431-20,  
the output side of the cord must be further  
processed to fit the instrument.

MEMORY HiLOGGER LR8431-20

## Specifications

Guaranteed accuracy period: 1 year

Measurement method	Using red visible-spectrum light and reflective tape or a reflective plate (Contact adapter Z5003)
Display	Transmissive FSTN LCD
Range switching	Automatic
Detection range	50mm to 500mm (1.97" to 19.7")
Reflection detection indicator	Flashing red LED built into [HOLD] key, buzzer
Sampling period	62.5 ms to 2 s (depending on usage conditions)
Display refresh rate	Approx. 0.5 to 10 times/sec
Drop proof	1m onto concrete surface
Dustproof and waterproof	IP50 (EN60529)
Functions	MAX/MIN display, Display hold, Average, Auto power save, Buzzer, Backlight function
Operating temperature	0 to 50°C (32 °F to 122 °F)
	Up to 40°C (104 °F) 80%RH or less
Operating humidity	40°C to 45°C (104 °F to 113 °F) 60%RH or less
	45°C to 50°C (113 °F to 122 °F) 50%RH or less (non-condensing)
Storage temperature and humidity	-10°C to 50°C (14 °F to 122 °F), 80%RH or less (non-condensing)
Applicable standards	EMC : EN61326 Safety : EN61010
Power supply	LR6 alkaline battery×2 AC adapter Z1004 (FT3406 only)
Maximum rated power	0.5VA
Continuous operating time	Approx. 30 hours (FT3405) or approx. 25 hours (FT3406); When using alkaline batteries with buzzer off
Dimensions	Approx. 71W×186H×38D mm (2.80"W×7.32"H×1.5"D)
Mass	Approx. 230g (8.1oz.) (with batteries)

### FT3406 only

Output level: 0-1Vf.s., Output resistance: 1kΩ, Accuracy: ±2%f.s., Accuracy guarantee temperature and humidity range: 23°C±5°C, 80%RH or less, Temperature coefficient: Add [accuracy specifications x 0.1 x ( T-23 )], where T is the operating temperature [°C]. No temperature coefficient for 18°C to 28°C range.
Pulse output
Output level: 0-3.3V±0.3V, Output resistance: 1kΩ Power input terminal, AC adapter detection, output terminal setting

## Specifications

Note 1: The lowermost digit is fixed at 0 at speeds of 20,000r/min and greater.

Note 2: The lowermost digit is fixed at 0 when the averaging setting is off.

### [Tacho Testing]

MODE	Non-contact		Contact	
	AVG=ON	AVG=OFF	AVG=ON	AVG=OFF
r/min	30.00 to 199.99		15.00 to 199.99	
	200.0 to 1999.9	300.0 to 1999.0	200.0 to 1999.9	150.0 to 1999.0
	2000 to 19999	2000 to 19990	2000 to 19999	2000 to 19990
	20000 to 99990	20000 to 99990		
r/s	0.5000 to 1.9999		0.2500 to 1.9999	
	2.000 to 19.999	5.000 to 19.990	2.000 to 19.999	2.500 to 19.990
	20.00 to 199.99	20.00 to 199.90	20.00 to 199.99	20.00 to 199.90
	200.0 to 1600.0	200.0 to 1600.0	200.0 to 333.0	200.0 to 333.0
Cycle (ms)	0.6000 to 1.9999	0.6000 to 1.9990		
	2.000 to 19.999	2.000 to 19.990	3.000 to 19.999	3.000 to 19.990
	20.00 to 199.99	20.00 to 199.90	20.00 to 199.99	20.00 to 199.90
	200.0 to 1999.9		200.0 to 3999.9	200.0 to 399.0

### [Count Testing]

count	0 to 999999 (Input conditions: Up to rotational speed measurement upper limit)
-------	---

### [Cycle Speed]

MODE	Contact		Accuracy:	
	AVG=ON	AVG=OFF	AVG=ON	AVG=OFF
Cycle (m/min)	1.500 to 19.999		Up to 9999 counts	±1dgt. ±10dgt.
	20.00 to 199.99	15.00 to 199.90	10000 counts or more	±2dgt. ±20dgt.
	200.0 to 1999.9	200.0 to 1999.0	20000 counts or more (r/min mode only)	±20dgt. ±100dgt.
	0.0250 to 1.9999	0.2500 to 1.9990	Period measurement only	±0.5%rdg. is added to above-mentioned accuracy.
Cycle (ms)	2.000 to 19.999	2.000 to 19.990		
	20.00 to 33.30	20.00 to 33.30		



Model : TACHO HiTESTER FT3405, FT3406

Model No. (Order Code) (Note)

FT3405

FT3406 (with analog output, pulse output)

Accessories: Instruction manual x1, Reflective tape 9211 x1 sheet (30 pieces/ 12 mm (0.47 in) × 12 mm (0.47 in) per piece), Carrying case C0202 x1, LR6 (AA) alkaline battery x2, \*FT3406 only: Output cord L9094 x1



**HIOKI**  
HIOKI E.E. CORPORATION

HEADQUARTERS  
81 Koizumi, Ueda, Nagano, 386-1192, Japan  
TEL +81-268-28-0562 FAX +81-268-28-0568  
http://www.hioki.com / E-mail: os-com@hioki.co.jp

HIOKI USA CORPORATION  
TEL +1-609-409-9109 FAX +1-609-409-9108  
http://www.hiokiusa.com / E-mail: hioki@hiokiusa.com

HIOKI (Shanghai) SALES & TRADING CO., LTD.  
TEL +86-21-63910090 FAX +86-21-63910360  
http://www.hioki.cn / E-mail: info@hioki.com.cn

HIOKI SINGAPORE PTE. LTD.  
TEL +65-6634-7677 FAX +65-6634-7477  
E-mail: info-sg@hioki.com.sg

HIOKI KOREA CO., LTD.  
TEL +82-2-2183-8847 FAX +82-2-2183-3360  
E-mail: info-kr@hioki.co.jp

DISTRIBUTED BY